Swagelok ¼ inch tube (compression) fittings and PFA tubing. Can also use ¼ inch stainless steel tubing with these. Find all of these at www.swagelok.com

Model Fluke PN ADPTR-102033 3068676 Description

ADAPTOR, 1/8 IN NPTM X 1/4 IN SWGM, SS-400-1-2



Stainless Steel Swagelok Tube Fitting, Male Connector, 1/4 in. Tube OD x 1/8 in. Male NPT Part No: SS-400-1-2

Unit Price: Log in to view price

ADPTR-100109 3068350

ADAPTOR, 1/4 IN NPTM X 1/4 IN SWGM, SS-400-1-4



Stainless Steel Swagelok Tube Fitting, Male Connector, 1/4 in. Tube OD x 1/4 in. Male NPT Part No: 55-400-1-4

Unit Price: Log in to view price

Tee



Part No.: SS-400-3

Description: SS Swagelok Tube Fitting, Union

Tee, 1/4 in. Tube OD

Unit Price: Log in to see pricing Availability: Log in to see availability

Cross

Part No.: SS-400-4

Description: SS Swagelok Tube Fitting, Union

Cross, 1/4 in. Tube OD

Unit Price: Log in to see pricing Availability: Log in to see availability

Port connector (unassembled)

Part No.: SS-401-PC

Description: SS Swagelok Tube Fitting, Port

Connector, 1/4 in. Tube OD

Unit Price: Log in to see pricing

Availability: Log in to see availability

Elbow

Part No.: SS-400-9

Description: SS Swagelok Tube Fitting, Union

Elbow, 1/4 in. Tube OD

Unit Price: Log in to see pricing

Availability: Log in to see availability



Extra ferrules (front and back)

Part No.: SS-400-SET

Description: 316 SS Ferrule Set (1 Front Ferrule/1 Back Ferrule) for 1/4 in. Swagelok Tube Fitting, Please order in multiples of ten

Unit Price: Log in to see pricing Availability: Log in to see availability

Link to Swagelok catalog for PFA tubing,

http://www.swagelok.com/downloads/webcatalogs/EN/MS-01-05.pdf

Part No.: PFA-T4-047-100

Description: PFA Tubing, 1/4 in. OD x 0.047 in. Wall x 100 Feet, NOTE: One "piece" equals

100 feet of tubing in a box Unit Price: Log in to see pricing Availability: Log in to see availability 200 psi at 70F, 180 psi at 100F

Part No.: PFA-T4-062-100

Description: PFA Tubing, 1/4 in. OD x 0.062 in. Wall x 100 Feet, NOTE: One "piece" equals 100 feet of tubing in a box Unit Price: Log in to see pricing Availability: Log in to see availability

275 psi at 70F, 245 psi at 100F

316L SS Braid, 500 to 3100 psig (34.4 to 213 bar)

Part No.

SS-FM4SL4SL4-36

Part Description:

316L SS Convoluted (FM) Hose, 1/4 in., 316L SS Braid, 1/4 in. Tube Fittings, 36 in. (91.4 cm) Length






















Single- and Double-End Shutoff Stems:

Single-end shutoff (SESO) stems have no valves and remain open when uncoupled (-S or -SC) Double-end shutoff (DESO) stems have valves and shut off when uncoupled.(-D) MB at the end of a part number designates a full flow body

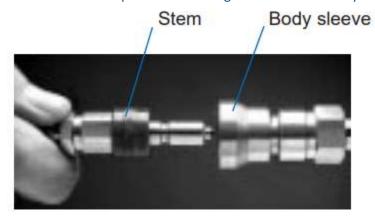

Fluke PN Description 3068665 QUICK CONNECTOR, 1/4 IN SWGM FOR SWG QCH, SESO, SS-QC4-S-400



3865828 (64-405), QUICK CONN, SESO, SS-QC4-S-4PM STEM ASSEMBLY SWAGELOK CO. SS-QC4-S-4PM



3068713 QUICK CONNECTOR, 1/4 IN NPTF FOR SWG QCH, SESO, SS-QC4-S-4PF



3136788 (102459), ADPT, QC, SS, BODY, 4T, SS-QC4-B-400



1811613 (759257-445), SWAGELOCK BODY ASSY SWAGELOK CO. SS-QC4-B-4PM



3068690 QUICK CONNECTOR, AN4M FOR SWG QCH, SS-QC4-SC-4AN

